



# DD 3030 Socket Weld Thermowell - Straight

## Thermowell

Design	Drilled bar stock (solid machined)
Process connection	Socket weld
Welding diameter	26.7mm, 33.4mm or 48.3mm
Material	SS 316 - (Wst1.4401)

## Stem / Shrank

Wetted part	Straight
Diameter	To specify
Insertion length "U"	To specify
Bore size	6.6 mm standard
Excentricity	< 1 micrometer
Bottom thickness	5 mm

## Connection length "x"


Standard length	50mm
-----------------	------

## Female connection


Threaded	1/2" NPT
----------	----------

## Options

- Other materials and dimensions
- Plug and chain for test well
- Protective coating, PTFE, Halar, Stellite etc.
- Tagging
- Wake frequency calculation

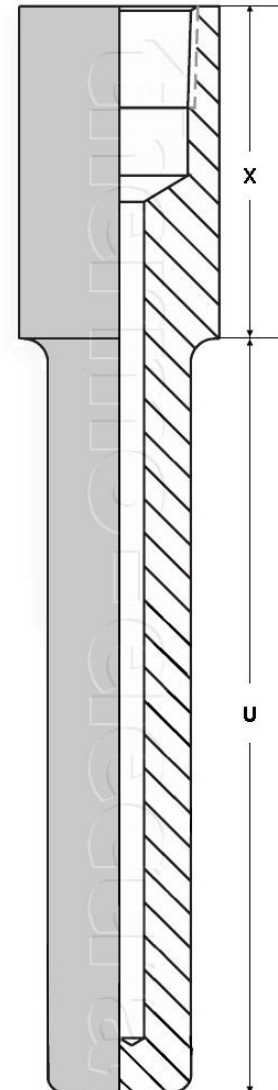

## Ordering code

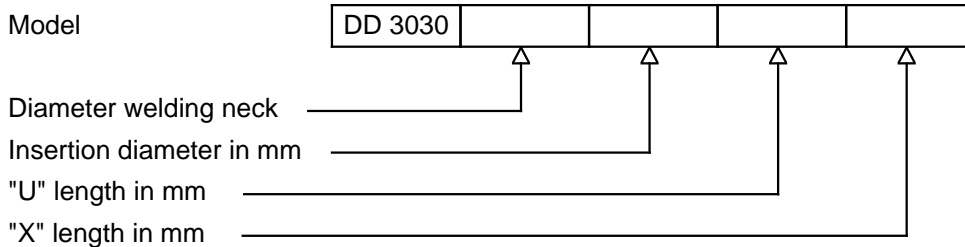

H3-1 Rev.0 7/07



**thermo-electra**  
 measurement and control technics

PO BOX 73  
 2640 AB Pijnacker  
 The Netherlands

Phone +31 (0)15 - 3621200  
 Fax +31 (0)15 - 3694082  
 Email sales@thermo.nl  
 Internet http://www.thermo-electra.com