



DWK 6100 Vibration Proof Thermocouple

Protection tube

Construction	Closed-end tube
Material	SS 316 - (Wst 1.4401)
Insertion length "L"	Customer to specify, standard 100 mm
Process connection	1 / 2" BSP

Connection head

Model	"B", according DIN 43729
Material	Cast aluminium
Cable entry	PG 16 cable gland


Sensing element

Type	MI 6150
Construction	Replaceable springloaded
Diameter	6 mm
Length "E"	E = L + 45 mm
Material	SS 316 - (Wst 1.4401)
Insulation	Mineral insulated MgO

Element

Calibration	K, T, J, E, N, U or L
For duplex	KK, TT, JJ, EE, NN, UU or LL
Accuracy	According IEC 584-1 / DIN 43710
Design	Vibration : 2 to 25 Hz - 1.6 mm 25 to 5000 Hz - 4 g

Ordering code

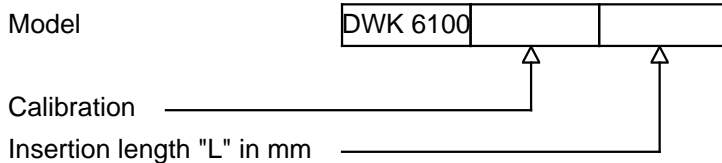

H6-1 Rev. 07/07



thermo-electra
 measurement and control technics

PO BOX 73
 2640 AB Pijnacker
 The Netherlands

Phone +31 (0)15 - 3621200
 Fax +31 (0)15 - 3694082
 Email sales@thermo.nl
 Internet <http://www.thermo-electra.com>