



# DWR 6040 Vibration Proof Sensor

## Design

Designed for use on combustion engines

## Protection tube

Construction Closed-end tube  
 Material SS 316 - ( Wst 1.4401 )  
 Insertion length "L" Customer to specify, standard 150 mm  
 Diameter 12 mm tapered to 8 mm  
 Process connection 1 / 2" BSP steel compression gland

## Lead wire

Heat and oil resistant armoured extension cable 250 °C

## Lead wire length "K"

Customer to specify, standard 1000 mm

## Element

Sensor Pt 100, 3 wire system  
 Connection 3 wire system ( Optional 4 wire system )  
 Accuracy According IEC 751 Class B  
 Hot junction Insulated  
 Testing Tested at 200 Volt / 20 °C  
 Insulation Minimum 100 M ohm  
 Design Vibrationproof

## Temperature

600 °C maximum


## Ordering code

Model 

DWR 6040		
----------	--	--

Length "L" in mm ↑

Length "K" in mm ↑

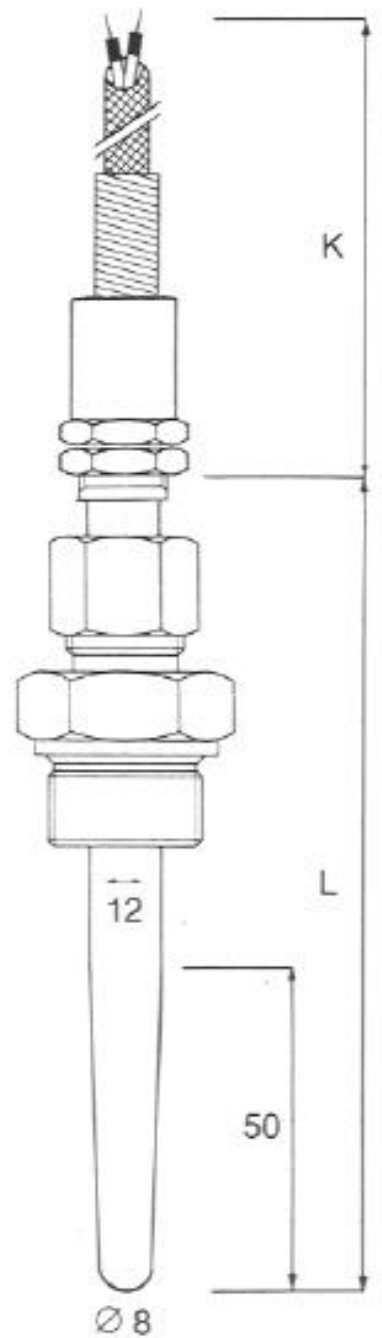

H6-1 Rev.07/07



**thermo-electra**  
 measurement and control technics

PO BOX 73  
 2640 AB Pijnacker  
 The Netherlands

Phone +31 (0)15 - 3621200  
 Fax +31 (0)15 - 3694082  
 Email sales@thermo.nl  
 Internet <http://www.thermo-electra.com>