



DWR 6090 Cargo Resistance Thermometer

Design

Designed for use on ships

Protection tube

Material SS 316 - (Wst 1.4401)
Tipdiameter 6 mm
Tip Sharp

Lead wire

Rubber insulated flexible copper wire

Lead wire length "K"


Customer to specify, standard 7000 mm

Sensor

Single Pt-100
Connection 3 wire system (Optional 4 wire system)
Accuracy According IEC 751 class A
Range -30 / +60 °C
Testing Tested at 200 Volt / 20 °C
Insulation Minimum 100 M ohm
Protection IP 65

Ordering code

Model
Length "K" in mm

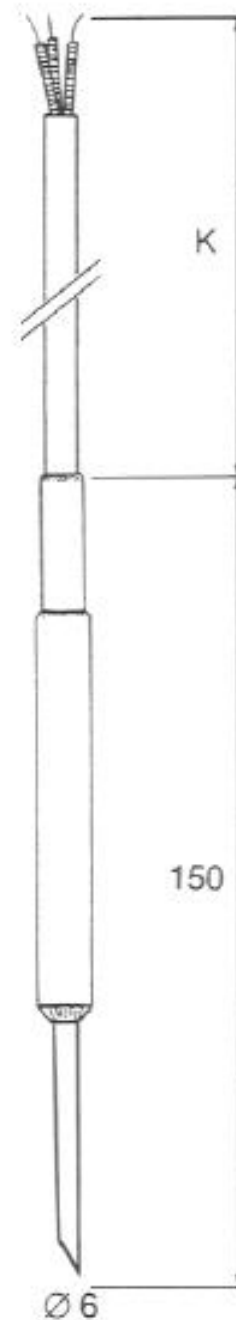

H6-1 Rev. 07/07



thermo-electra
measurement and control technics

PO BOX 73
2640 AB Pijnacker
The Netherlands

Phone +31 (0)15 - 3621200
Fax +31 (0)15 - 3694082
Email sales@thermo.nl
Internet <http://www.thermo-electra.com>