



TE1028V Multiple Thermocouple Circuit Panel, Vertical

Application

Female multi panel Thermocouple and RTD circuits
 Contacts Springloaded thermocouple contacts
 Materials Glass filled thermocouple body with original thermocouple material contacts
 Front Aluminium anodized for full corrosion protection

Temperature rating

Temperature limit Maximum 200°C

Construction

Body Glass filled thermoplastic material
 Design Stainless steel bracket mounted with 2 screws
 Molded barriers Prevent short circuit
 Identified Scratchproof Numbering

Wire size


Accepts wires From 0,2mm. to 2,0mm

Color code


according thermocouple calibration



Dimensions in mm			
Circuits	Rows	L	H
1	1	38	38
6	1	146	67
12	1	260	67
24	2	260	115

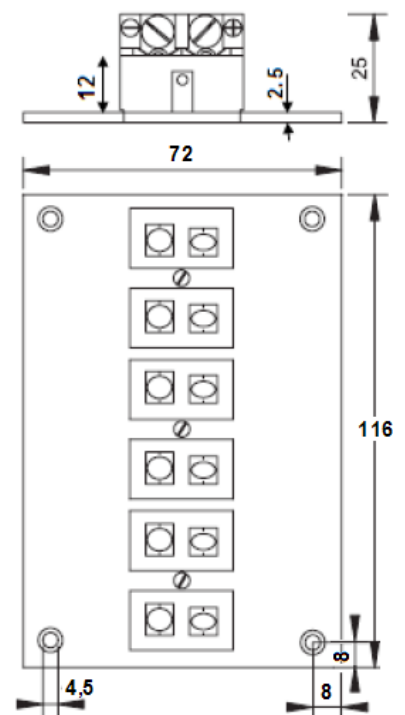

Ordering code

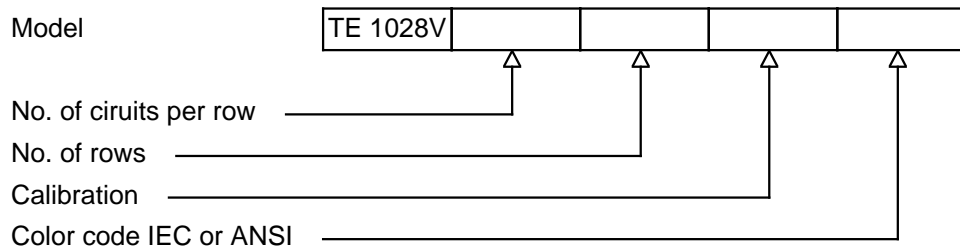

H9-2 Rev. 0 07/07