



# TF 5830 Mineral Insulated Bayonet Thermocouple

## Construction

Insertion	Springloaded Mineral Insulated
Sheath diameter "D"	1,5 or 3 mm, please specify
Material	SS 316 - ( Wst 1.4401 )
Bayonet	Diameter 12.2 mm, one slot
Spring	Length 200 mm

## Lead wire

Flexible insulated armoured thermocouple wire

## Lead wire length "K"

Customer to specify ( 3000 mm standard )



## Element

Calibration	K, J or L
For duplex	KK, JJ or LL
Accuracy	According IEC 584-1 / DIN 43710
Temperature	800 °C maximum
Hot junction	Insulated

## Bayonet adaptor

Model B1	Process connection 1 / 4 " BSP
Model B2	Process connection 3 / 8 " BSP
Model B3	Process connection M14 x 1.5
	Please order separately

## Ordering code

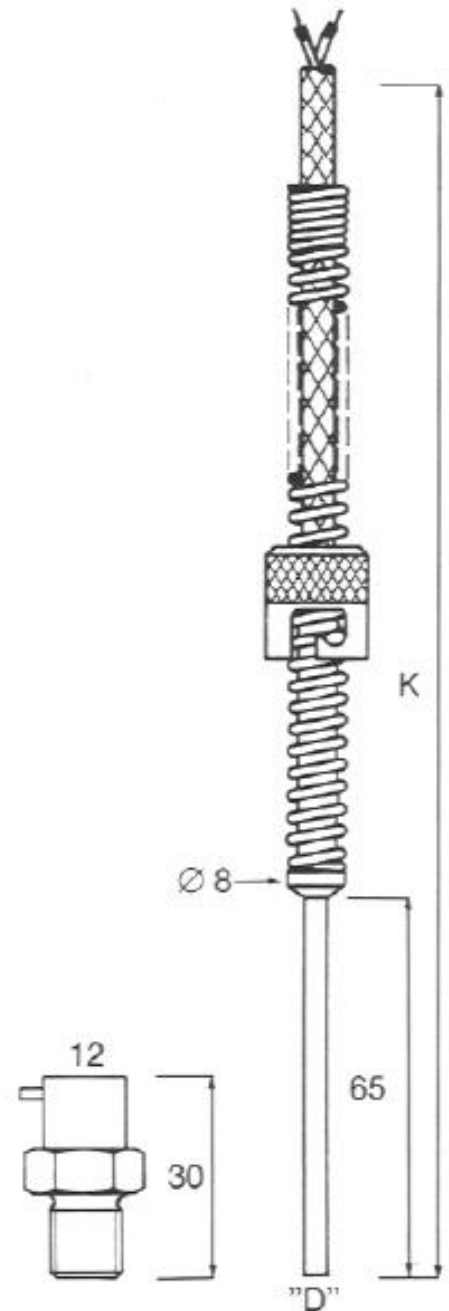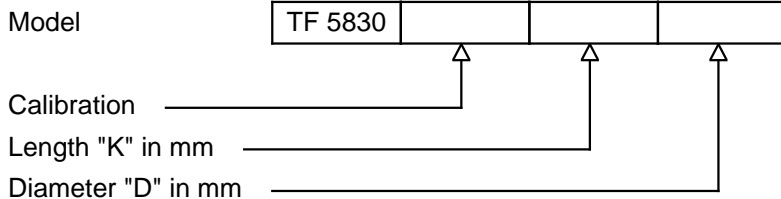

H5-1 Rev. 07/07



**thermo-electra**  
measurement and control technics

PO BOX 73  
2640 AB Pijnacker  
The Netherlands

Phone +31 (0)15 - 3621200  
Fax +31 (0)15 - 3694082  
Email sales@thermo.nl  
Internet <http://www.thermo-electra.com>