

ML7060 Spot temperatuur sensor



Ontwerp

Designed for measuring on one spot the temperature into oiltanks especially in combination with levelgauging equipment

Sensor

Enkele Pt-100
Nauwkeurigheid Volgens DIN 43760 klasse A

Goedkeuring

Dutch IJkwezen no. AW 173
Mantel SS 316 - (WST 1.4401) 6 mm OD
Balloon spring For good cenahon into thermowell and optimal contact with inner wall of thermowell
Lengte "L" Te specificeren
Meetbereik -50 to +150 °C
Uitvoering / Aansluiting 4 draads systeem
Procesaansluiting Fixed fitting 190 mm thread type 1 / 2" BSP
Locknut 1 / 2 "BSP roestvrij staal


Aansluitkabel

PVC geïsoleerde soepele koperdraden

Kabellengte "K"



Bestelcode

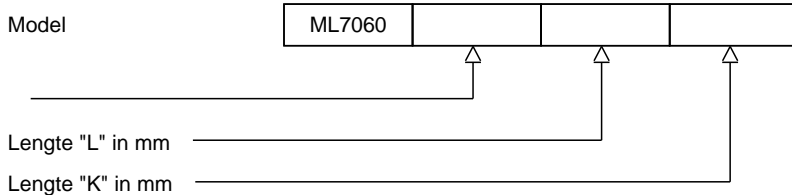

H7-1 Rev. 07/07



thermo-electra
temperature sensor solutions

Thermo Electra B.V.
Weteringweg 10
2641KM Pijnacker
The Netherlands

Phone +31 (0)15 - 3621200
Fax +31 (0)15 - 3694082
Email sales@thermo-electra.com
http://www.thermo-electra.com

