

# ME 1072 Mineral insulated thermocouple with tinned copper braided FEP/PFA cable

## Sheath

<b>Construction</b>	Mineral insulated
<b>Material</b>	SS 316 - (Wst 1.4401) Also available in SS310, Inconel 600, Hasteloy X and Nicrosil D
<b>Insulation</b>	MgO
<b>Diameter</b>	Customer to specify
<b>Length</b>	Customer to specify

## Extension cable

	FEP/PFA insulated flexible thermocouple cable, with tinned copper braiding up to +220°C
<b>Length</b>	Customer to specify


## Thermocouple

<b>Calibration</b>	K, T, J, E, N, U or L
<b>For duplex</b>	KK, TT, JJ, EE, NN, UU or LL
<b>Accuracy</b>	According IEC 60584
<b>Hot junction</b>	Insulated
<b>Testing</b>	Tested 500 Volt @ 20 °C
<b>Insulation resistance</b>	Minimum 100 M ohm
<b>Available diameter</b>	(0.25 - 0.5 - 1.0)* 1.5 - 2.0 - 3.0 - 4.56.0 and 8.0 mm. Other diameters possible* single only



## Ordering code

\*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

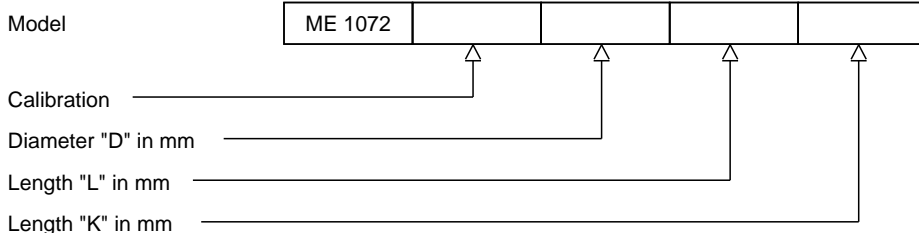

H1-1 Rev.0 7/07

