

# CA 2022 Industrial resistance thermometer

## Protection tube

<b>Construction</b>	Closed-end tube
<b>Diameter</b>	9.0mm standard, other diameters possible
<b>Material</b>	SS 316 - (Wst 1.4401) standard, other materials possible
<b>Insertion length</b>	Customer to specify
<b>Process connection</b>	M20x1.5, 1/2"BSP (G1/2"), 1/2"NPT or other threads possible

## Connection head

<b>Material</b>	Aluminium, plastic or stainless steel
<b>Cable entry</b>	M20x1.5 cable gland standard, other threads possible

## Measuring insert

<b>Type</b>	MI 2025
<b>Construction</b>	Springloaded and replaceable
<b>Diameter</b>	6.0mm standard, other diameters possible
<b>Length</b>	$E = L + 62,5$ mm
<b>Material</b>	SS 316 - (Wst 1.4401) standard, other materials possible


## Sensor

Singel or Duplex Pt100

<b>Accuracy</b>	According IEC 60751 class B
<b>Style / Connection</b>	3-wire system standard, 4-wire system optional
<b>Range</b>	-220 / + 600 °C

## Options

<b>Transmitter 4-20mA</b>	In-Head transmitter, standard or Ex version. Please select from our standard range or specify your own standard
<b>Swing-Cover head</b>	DAN, transmitter direct mounted on measuring insert
<b>High Swing-Cover head</b>	DAN-H, transmitter in cover, insert with ceramic block

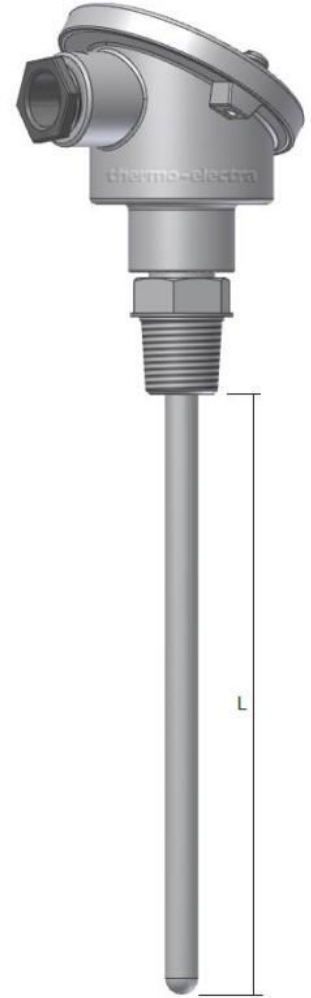

## Ordering code

Model	CA 2022		
Sensor (S or D)			
Length "L" in mm			

H2-1 Rev.0 7/07



**thermo-electra**  
temperature sensor solutions

Thermo Electra B.V.  
Weteringweg 10  
2641KM Pijnacker  
The Netherlands

Phone +31 (0)15 - 3621200  
Fax +31 (0)15 - 3694082  
Email sales@thermo-electra.com  
http://www.thermo-electra.com

