

MI 2026 resistance thermometer insert for 4-20mA transmitter

Sheath

Construction	Welded bottom
Material	SS 316 - (Wst 1.4401) standard, other materials possible
Insertion length	Customer to specify

Style / Connection

Application	For mounting
Construction	Springloaded according DIN 43762
Wires	60 mm, insulated wires

Sensor

	Single or Duplex Pt100
Accuracy	According IEC 60751 class B
Style / Connection	3-wire system standard, 4-wire system optional
Range	-220 / + 600 °C
Insulation material	Mineral insulated (MgO)
Testing	Tested 200 Volt @ 20°C
Insulation resistance	Minimum 100 M ohm


Options

Accuracy	Class B, A or AA
Style / Connection	2 wire or 4 wire
	2 wire with compensationloop
	Customer to specify separately



Ordering code

*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

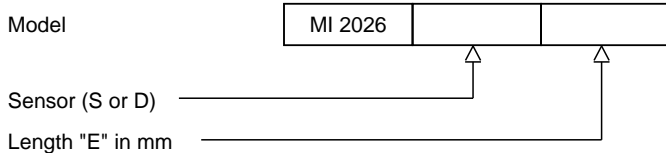

H2-1 Rev.0 7/07



thermo-electra
temperature sensor solutions

Thermo Electra B.V.
Weteringweg 10
2641KM Pijnacker
The Netherlands

Phone +31 (0)15 - 3621200
Fax +31 (0)15 - 3694082
Email sales@thermo.nl
http://www.thermo-electra.com

