

DD 3050 Weld-in thermowell according to DIN43772 Form 4

Thermowell

Design Drilled bar stock (solid machined)

Process connection Weld-in

Material

Stock items Wst. 1.4571, 1.4404, 1.7335, 1.5415, 1.0460

Other materials To specify

Stem / Shrank

Wetted part Tapered

Dimensions

Length L1, L2, L3. See table

Standard According DIN 43772 Form 4

Bore Size 7mm

Tolerance H7

Options

Other dimensions or bore size

Plug and chain for test wells

Tagging


Wake frequency calculation

Type	L1	L2	L3	D1	D2	Connect.
D1	140	50	65	24	12,5	M18x1.5
D2	200	50	125	24	12,5	M18x1.5
D3	200	50	125	30	16	M18x1.5
D4	200	110	65	24	12,5	M18x1.5
D5	260	110	125	24	12.5	M18x1.5
D6	225	105	125	30	16	M18x1.5



Ordering code

*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

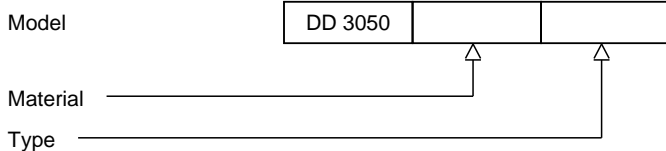

H3-1 Rev.0 7/07



thermo-electra
temperature sensor solutions

Thermo Electra B.V.
Weteringweg 10
2641KM Pijnacker
The Netherlands

Phone +31 (0)15 - 3621200
Fax +31 (0)15 - 3694082
Email sales@thermo.nl
<http://www.thermo-electra.com>

