



TEB Silicone sealing boots

| Application | |
|--------------------|---|
| Application | The two flexible siliconerubber boots will cover the connectorset snugly and prevent moisture,water and dirt entering the connector |
| Models | |
| Connector type | Available for Miniature connectors (M) and for Standard connectors (S) |
| Material | |
| Material | Silicone cover with retention ring |
| Advantages | Prevent disconnection due to vibration. Tapered entrance hole to ensure proper sealing on the most cable diameters. |
| Temperature rating | Maximum 200°C |
| Ordering | |
| Specify | Miniature (M), or Standard (S) Connector |
| Supply | |
| Supply quantity | Comes as a set of two parts |

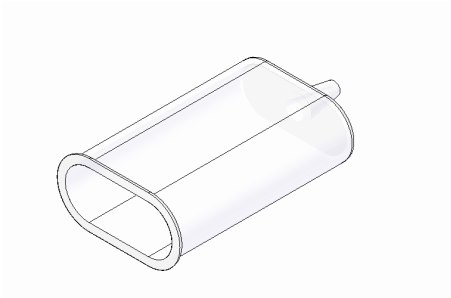

Ordering code

*This datasheet is purely indicative, build-up of model code may vary from this datasheet.



H9-1 Rev.0 7/07