

E81 All pairs and overall screened thermocouple extension cable -30°C to 85°C

Specifications

Insulation material	Each wire inner high quality extruded PVC
Individual shield	Aluminium mylar tape, 100% coverage with drain wire.
Overall shield	Aluminium mylar tape, 100% coverage with drain wire
Shape	Round
Moisture resistance	Good
Flame resistance	Good
Temperature limits	-30/+85 °C

Conductors

Conductor type	Solid
Conductor size	0.8 mm
Number of pairs	2, 4, 6, 8, or 12 pairs
Construction	Twisted pairs ± 20 times per meter

Calibration

Thermocouple type	K, T, J, E, U, L, N, B, R or S
Limits of error	Conforms to IEC 584 and ANSI MC 96.1

Colour code


	According thermocouple calibration
Pair identification	Each pair numbered

Dimensions

Number of pairs	2	4	6	8	12	Pair
Outside diameter ±	7.0	10.0	11.5	12.5	15.0	mm
Weight ±	73	122	155	196	302	kg/km



Ordering code

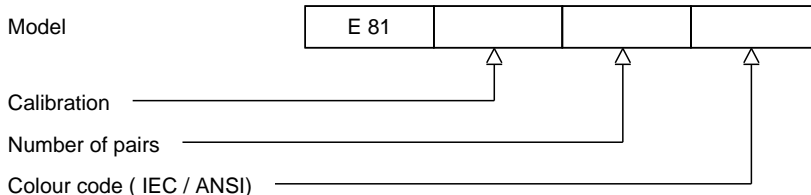

H8-1 Rev. 07/07



thermo-electra
temperature sensor solutions

Thermo Electra B.V.
Weteringweg 10
2641KM Pijnacker
The Netherlands

Phone +31 (0)15 - 3621200
Fax +31 (0)15 - 3694082
Email sales@thermo-electra.com
http://www.thermo-electra.com

