

# TF 5840 Bayonet type thermocouple

## Construction

<b>Insertion length</b>	Springloaded, fixed pressure
<b>Diameter</b>	5.0mm standard, other diameters possible
<b>Length L1 x L2</b>	Code A : L1 = 70, L2 = 20 Code B : L1 = 95, L2 = 45
<b>Spring</b>	Diameter 7.0mm, springloading action
<b>Bayonet</b>	Diameter 12.2mm, one slot

## Extension cable


	Glassfiber insulated thermocouple cable with steelwire braiding
<b>Length</b>	3000mm standard, other lengths possible

## Thermocouple

<b>Calibration</b>	K, J or L
<b>For duplex</b>	KK, JJ or LL
<b>Accuracy</b>	According IEC 60584 / DIN 43710
<b>Temperature</b>	400°C maximum
<b>Hot junction</b>	Grounded

## Bayonet adaptor

<b>Model B1</b>	Process connection 1/4"BSP (G1/4")
<b>Model B2</b>	Process connection 3/8"BSP (G3/8")
<b>Model B3</b>	Process connection M14x1.5
	Please order separately

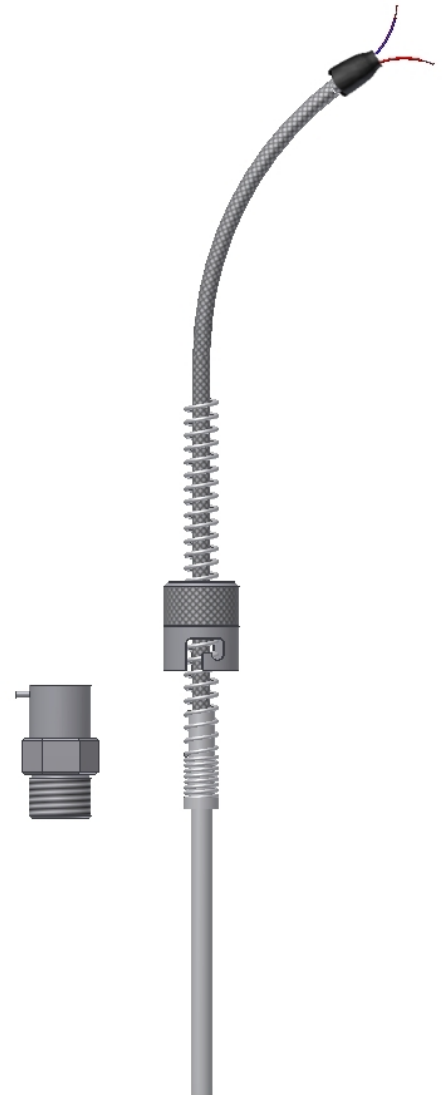

## Ordering code

Model	TF 5840			
Calibration				
Length "K" in mm				
Code A or B				

H5-1 Rev. 07/07



**thermo-electra**  
temperature sensor solutions

Thermo Electra B.V.  
Weteringweg 10  
2641KM Pijnacker  
The Netherlands

Phone +31 (0)15 - 3621200  
Fax +31 (0)15 - 3694082  
Email sales@thermo-electra.com  
http://www.thermo-electra.com

