

TF 5860 Plastic melt thermocouple adjustable length

Insertion length

Tip	Adjustable insertion length
Barrel	Drilled SS 316 - (Wst 1.4401) standard, other materials possible
Construction	Element replaceable. optional welded or vacuum brazed
Length	75mm standard, other lengths possible
Process connection	1/2"-20UNF standard, other threads possible
Drawing	Detail drawing available

Thermocouple

Calibration	J, K or L
For duplex	JJ, KK or LL
Accuracy	According IEC 60584
Hot junction	Grounded

Extensioncable


Teflon insulated flexible extension cable with stainless steel flexible hose, up to 240°C

Length	Customer to specify
Style / Connection	2 pole thermocouple plug model TE 1060



Ordering code

*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

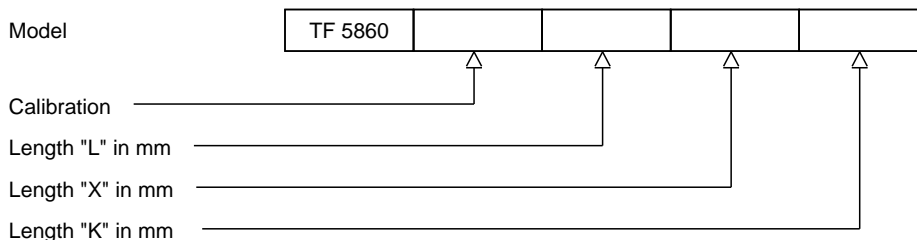

H5-1 Rev. 07/07



thermo-electra
temperature sensor solutions

Thermo Electra B.V.
Weteringweg 10
2641KM Pijnacker
The Netherlands

Phone +31 (0)15 - 3621200
Fax +31 (0)15 - 3694082
Email sales@thermo.nl
<http://www.thermo-electra.com>

