

WF 5810 Adjustable bayonet resistance thermometer

Construction

Insertion length	Springloaded
Diameter	8 mm
Bayonet	Diameter 12.2 mm, one slot
Spring	Length 200 mm

Cable

Teflon insulated flexible cable with stainless steel braiding, 240°C

Cable length "K" Customer to specify, 3000mm standard

Tip length "L"

Customer to specify 16 or 40 mm

Temperature

400°C maximum

Sensor

Single Pt 100

Accuracy According IEC 751 class B

Style / Connection 3 wire system

Bayonet adaptor

Please order separately

Model B1 Process connection 1/4" BSP


Model B2 Process connection 3/8" BSP

Model B3 Process connection M14 x 1.5



Ordering code

*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

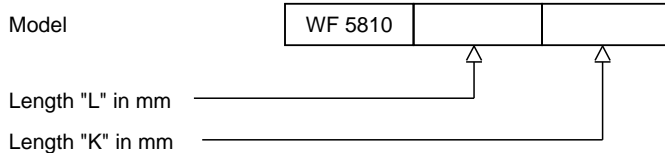

H5-1 Rev. 07/07



thermo-electra
temperature sensor solutions

Thermo Electra B.V.
Weteringweg 10
2641KM Pijnacker
The Netherlands

Phone +31 (0)15 - 3621200
Fax +31 (0)15 - 3694082
Email sales@thermo.nl
<http://www.thermo-electra.com>

