

WF 5820 Adjustable bayonet resistance thermometer

Construction

Insertion length	Springloaded
Diameter	8 mm
Bayonet	Diameter 15 mm, two slots
Spring	Length 200 mm

Cable

PTFE insulated flexible cable with stainless steel braiding, 240°C

Cable length Customer to specify (3000 mm standard)

Tip length

Customer to specify 16 or 40 mm

Temperature

400°C maximum

Sensor

Single Pt 100

Accuracy According IEC 751 class B

Style / Connection 3 wire system

Bayonet adaptor

Please order separately

Model A1 Process connection 1/4"BSP


Model A2 Process connection 3/8"BSP

Model A3 Process connection M14 x 1.5



Ordering code

*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

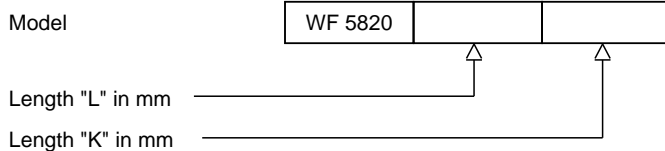

H5-1 Rev. 07/07



thermo-electra
temperature sensor solutions

Thermo Electra B.V.
Weteringweg 10
2641KM Pijnacker
The Netherlands

Phone +31 (0)15 - 3621200
Fax +31 (0)15 - 3694082
Email sales@thermo.nl
<http://www.thermo-electra.com>

