

DWR 6060 Bearing resistance thermometer

Design

Designed for use on ships

Type Approval

LLoyds Register Marine

Category

LV2000 range

Sheath

Construction

Mineral insulated

Material

SS 316 - (Wst 1.4401) standard, other materials possible

Diameter

3.0mm standard, other diameters possible

Length

Customer to specify

Process connection

2 compression glands 1/4"BSP (G1/4") standard, other threads possible

Cable

Silicon insulated flexible cable, 240°C

Cable length

Customer to specify

Sensor

Single Pt100

Accuracy

According IEC 60751 class B

Style / Connection

3-wire system standard, 4-wire system optional

Range


-100 / +250°C

Testing

Tested 200 Volt @ 20°C


Insulation

Minimum 100 M ohm

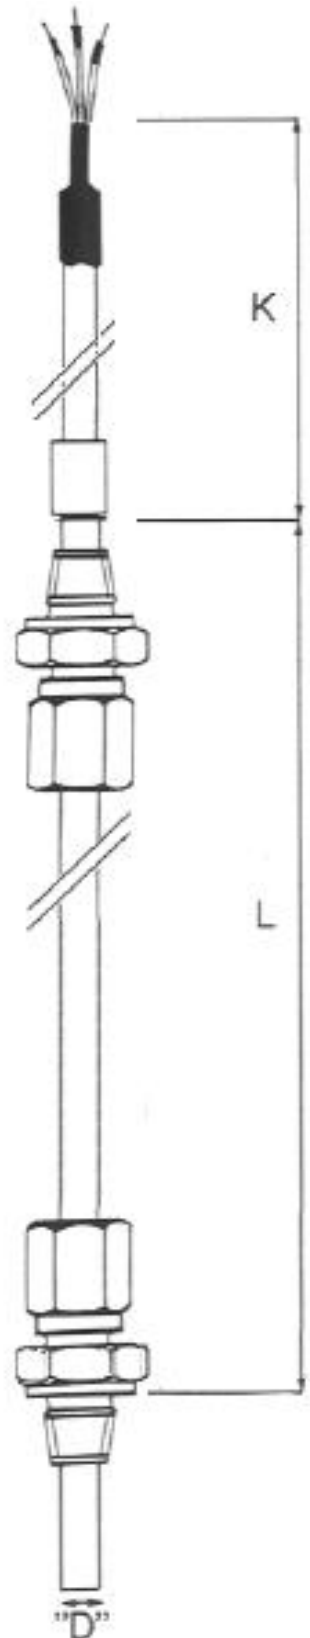

Ordering code

*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

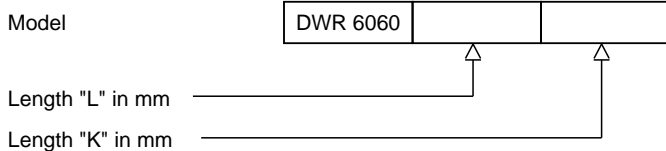

H6-1 Rev. 07/07



thermo-electra
temperature sensor solutions

Thermo Electra B.V.
Weteringweg 10
2641KM Pijnacker
The Netherlands

Phone +31 (0)15 - 3621200
Fax +31 (0)15 - 3694082
Email sales@thermo.nl
<http://www.thermo-electra.com>

