

ML7060 Spot temperature sensor




Design	Designed for measuring on one spot the temperature into oiltanks especially in combination with levelgauging equipment
Sensor	Single Pt-100
Accuracy	Accordinging DIN 43760 class A
Approval	Dutch IJkwezen no. AW 173
Sheath	SS 316 - (Wst 1.4401) 6 mm O.D.
Balloon spring	For good cenahon into thermowell and optimal contact with inner wall of thermowell
Length	Customer to specify
Range	-50 to +150 °C
Style / Connection	4 wire system
Process connection	Fixed fitting 190 mm thread type 1 / 2" BSP
Locknut	1 / 2" BSP stainless steel
Lead wire	PVC insulated stranded copper wires
Lead wire length "K"	



Ordering code

*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

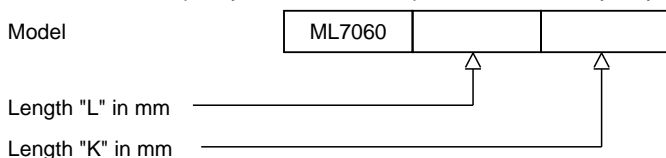

H7-1 Rev. 07/07



thermo-electra
temperature sensor solutions

Thermo Electra B.V.
Weteringweg 10
2641KM Pijnacker
The Netherlands

Phone +31 (0)15 - 3621200
Fax +31 (0)15 - 3694082
Email sales@thermo.nl
http://www.thermo-electra.com

