

## Design

<b>Protection tube</b>	Stainless steel closed-end tube
<b>Stepped insertion</b>	Re-inforced tube to suit a compression gland
<b>Material</b>	SS 316 - (Wst 1.4401) standard, others optional
<b>Measuring points</b>	Number of measuring points to specify

## Sensors

<b>Calibration</b>	K, T, J, E, N, U or L to specify
<b>Insulation</b>	Each sensor mineral insulated (MgO)
<b>Hot junctions</b>	Insulated
<b>Testing</b>	Tested with 50Vdc @ 20°C
<b>Insulation resistance</b>	Minimum 100 M ohm
<b>Range</b>	D ≤ 3.2mm maximum +300 °C D > 3.2mm maximum +500 °C


## Dimensions

<b>Hot junctions</b>	"L1 to Ln" to specify
<b>Protection</b>	Lead wires protected by a stainless steel flexible hose
<b>Length "K"</b>	1000 mm standard hose length. M20x1.5 gland included
<b>Termination</b>	PTFE/FEP/PFA insulated flexible thermocouple wires, L=100mm
<b>Process connection</b>	Compression gland with metal or PTFE ferule (optional)

## Options


<b>ATEX certification</b>	Exe, Exi or Exd, to specify
<b>Materials</b>	SS316, SS321, SS310, Inconel 600 customer to specify

Outside diameter "D"	Sensors
1.5 mm	3
2 mm	5
3 mm, 3.2mm	6
6 mm , 6.4 mm	12

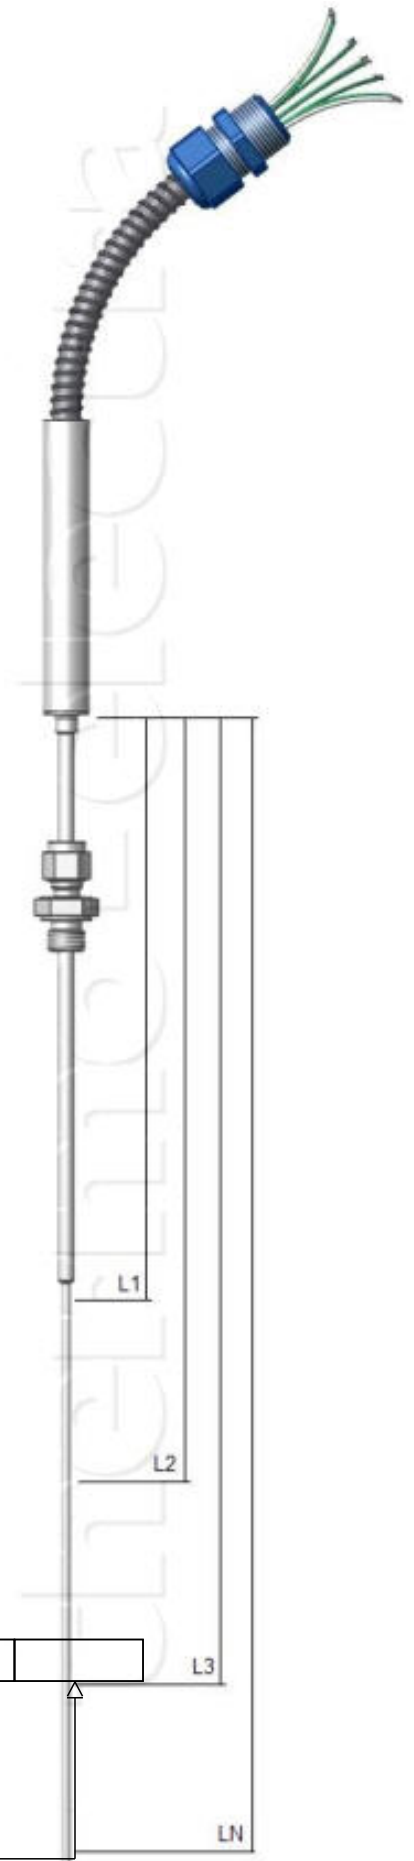

## Ordering code

Model



Number of elements / Calibration

Reinforcement tube / sensor tube O.D. in mm

L1 to Ln, and total length L in mm

Leadwire length "K" in mm