


T12 Glassfibre insulated thermocouple wire up to +540°C

Insulation material	Each wire and overall jacket, high temperature resistant braided material
Shape	Flat
Insulation	Glass fibre
Moisture resistance	Poor
Temperature limits	0/+540°C
Conductors	Solid, parallel
Conductor sizes	0.2, 0.5, 0.8 or 1.0mm
Calibration	
Thermocouple type	K, T, J, E, N, U or L Batch certificate Calibration certificate
Options	



Ordering code

*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

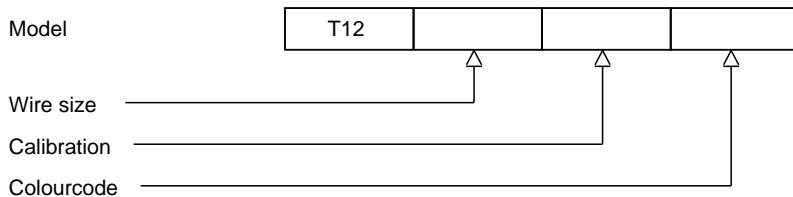

H8-1 Rev. 07/07



thermo-electra
temperature sensor solutions

Thermo Electra B.V.
Weteringweg 10
2641KM Pijnacker
The Netherlands

Phone +31 (0)15 - 3621200
Fax +31 (0)15 - 3694082
Email sales@thermo.nl
<http://www.thermo-electra.com>

