

# E35P Flat PVC thermocouple extension cable -30°C to 85°C

## Specifications

|                            |  |
|----------------------------|--|
| <b>Insulation material</b> | Each wire and overall jacket high quality extruded PVC |
| <b>Temperature limits</b>  | -30/+85°C  |
| <b>Moisture resistance</b> | Good   |

## Conductors

|                       |                                  |
|-----------------------|----------------------------------|
| <b>Conductor type</b> | Stranded, parallel conductors    |
| <b>Conductor size</b> | 1.5 mm <sup>2</sup> (48x0.2 mm ) |

## Calibration

|                          |  |
|--------------------------|--|
| <b>Thermocouple type</b> | K, T, J, E, U, L, N, B, R or S                       |
| <b>Limits of error</b>   | Conforms to IEC 60584 and ANSI MC 96.1               |
| <b>Colourcode</b>        | According thermocouple calibration IEC, ANSI, BS etc |


## Applications

Cabinets and instrumentation circuit wiring, testing, HVAC, General industry



## Ordering code

\*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

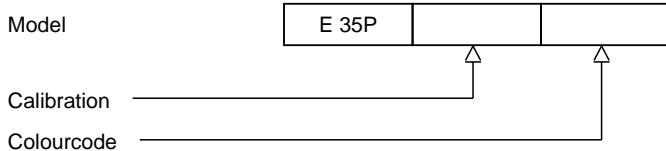

H8-1 Rev. 07/07



**thermo-electra**  
temperature sensor solutions

Thermo Electra B.V.  
Weteringweg 10  
2641KM Pijnacker  
The Netherlands

Phone +31 (0)15 - 3621200  
Fax +31 (0)15 - 3694082  
Email sales@thermo.nl  
<http://www.thermo-electra.com>

