

E65 Armoured multipair thermocouple extension cable 1.5 mm²

Specifications

Insulation material	Each wire high quality extruded PVC
Armour	Steel wire braiding (SWB) 0.3 mm galvanised
Overall jacket	High quality extruded PVC
Shape	Round
Moisture resistance	Good
Flame resistance	Good
Temperature limits	-30/+85 °C

Conductors

Conductor type	Stranded
Conductor size	1.5 mm ² (48 x 0.2 mm)
Number of pairs	1, 2, 4, 6, 8 or 12 pairs
Pair identification	Each wire numbered

Calibration

Thermocouple type	K, T, J, E, U, L, N, B, R or S
Limits of error	According IEC 60584-3, 2007 and ANSI MC 96.1
Colourcode	According thermocouple calibration IEC, ANSI, BS etc.

Delivery


On roll	Up to 200 meter
On reel	Length > 200 meter

Number of pairs	1	2	4	6	8	12	Pair
Outside diameter	10.2	11.5	17	18.5	19.5	23.5	mm
Weight	185	240	400	520	700	1020	kg/km



Ordering code

*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

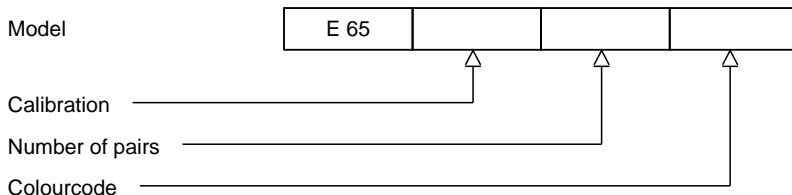

H8-1 Rev. 07/07



thermo-electra
temperature sensor solutions

Thermo Electra B.V.
Weteringweg 10
2641KM Pijnacker
The Netherlands

Phone +31 (0)15 - 3621200
Fax +31 (0)15 - 3694082
Email sales@thermo.nl
<http://www.thermo-electra.com>

