

E75 Armoured thermocouple extension cable -30°C to +85°C

Specifications

Insulation material	Each wire high quality extruded PVC
Electrical screen	Two layers of aluminium mylar tape with drain wire
Inner Jacket	Each wire high quality extruded PVC
Armour	Galvanised steel wire armour (SWA) 0.3mm
Overall jacket	High quality extruded PVC
Shape	Round
Moisture resistance	Good
Flame resistance	Good
Mechanical strenght	Excellent
Temperature limits	-30/+85°C

Conductors

Conductor type	A) Solid or B) Stranded
Conductor size	Solid 1.3 mm, Stranded 1.5 mm ² (48x0.2 mm)

Calibration


Thermocouple type	K, T, J, E, U, L, N, B, R or S
Limits of error	Conforms to IEC 60584 and ANSI MC 96.1
Colourcode	According thermocouple calibration IEC, ANSI, BS etc.

Outside diameter	9.8	11	mm
Weight	140	150	kg/km



Ordering code

*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

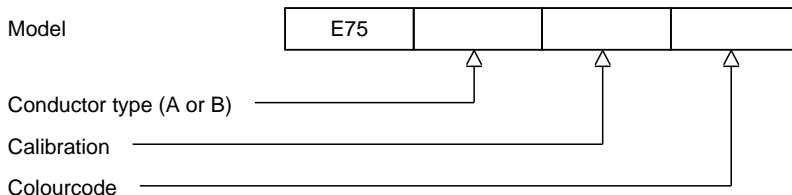

H8-1 Rev. 07/07



thermo-electra
temperature sensor solutions

Thermo Electra B.V.
Weteringweg 10
2641KM Pijnacker
The Netherlands

Phone +31 (0)15 - 3621200
Fax +31 (0)15 - 3694082
Email sales@thermo.nl
<http://www.thermo-electra.com>

