

E90 Thermocouple extension cable PVC with steel wire armour (SWA) -30°C to +85°C

Specifications

| | |
|----------------------------|--|
| Insulation material | Each wire high quality extruded PVC |
| Electrical screen | Two layers of aluminium mylar tape with tinned copper drain wire |
| Inner Jacket | High quality extruded PVC |
| Armour | Steel Wire Armour (SWA) 0.9 mm galvanised |
| Outer jacket | High quality extruded PVC |
| Shape | Round |
| Moisture resistance | Good |
| Flame resistance | Good |
| Temperature limits | -30/+85°C |

Conductors


| | |
|------------------------|---|
| Conductor type | Solid |
| Conductor size | 1.3mm (16 AWG) |
| Construction | Twisted pair |
| Calibration | K, T, J, E, U, L, N, B, R or S |
| Limits of error | Conforms to IEC 60584 and ANSI MC 96.1 |
| Colourcode | According thermocouple calibration IEC, ANSI, BS etc. |

| | | |
|------------------|-----|-------|
| Outside diameter | 13 | mm |
| Weight | 320 | kg/km |



Ordering code

*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

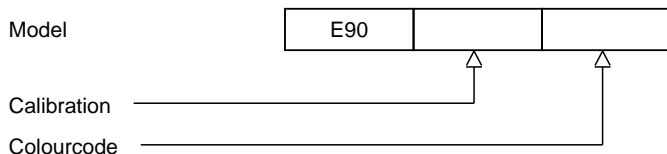

H8-1 Rev. 07/07



thermo-electra
temperature sensor solutions

Thermo Electra B.V.
Weteringweg 10
2641KM Pijnacker
The Netherlands

Phone +31 (0)15 - 3621200
Fax +31 (0)15 - 3694082
Email sales@thermo.nl
<http://www.thermo-electra.com>

