

C 10 Copper Extension Cable, with Copper Braiding and Overall Jacket

Insulation


	Each wire and overall jacket high quality extruded PVC
Armour	Tinned copper wire, braiding 0.15 mm
Shape	Round
Moisture resistance	Good
Flame resistance	Good
Mechanical strenght	Excellent
Temperature limits	-15 / +95 ° C

Conductors

	Stranded, bare copper
Conductor size	0.14 - 0.34 - 0.5 or 0.75 mm ²
Please specify	
Number of conductors	2, 3, 4 or 6
Please specify	

Ordering code

*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

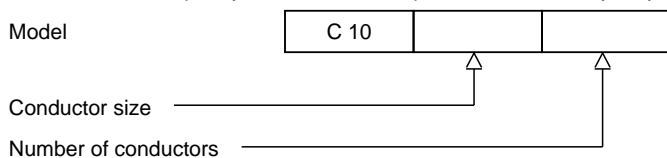

H8-1 Rev. 07/07



thermo-electra
temperature sensor solutions

Thermo Electra B.V.
Weteringweg 10
2641KM Pijnacker
The Netherlands

Phone +31 (0)15 - 3621200
Fax +31 (0)15 - 3694082
Email sales@thermo.nl
<http://www.thermo-electra.com>