

Construction

ATEX execution	II 1 G Ex ia IIC T6...T1 Ga II 1/2 G Ex ia/ib IIC T6...T1 Ga/Gb II 2 G Ex ib IIC T6...T1 Gb
ATEX certificate	DEKRA 17ATEX0123 X
IECEx execution	Ex ia IIC T6...T1 Ga Ex ia/ib IIC T6...T1 Ga/Gb Ex ib IIC T6...T1 GB
IECEx certificate	IECEx DEK 17.0046X
Suitable for zone	0, 1 and 2
Ingress protection	IP65 / IEC529
Ambient temp. range	-45°C...+80°C, this can be limited depending on the materials applied such as cables, connection heads, junction boxes and transmitters.

Connection head

Model	CE (showed), other connectionheads possible
Material	Aluminium, plastic or stainless steel
Cable entry	M20x1.5 standard, other threads possible

Measuring insert

Construction	Springloaded and replaceable
Springaction	>10mm standard, >40mm optional
Diameter	6.0mm standard, other diameters possible
Type	Mineral insulated (MgO)

Thermocouple


Calibration	K, T, J, E, N, R, S, B, U or L
For duplex	KK, TT, JJ, EE, NN, RR, SS, BB, UU or LL
Accuracy	According to IEC 60584-1

Extension

Type	Nipple - union - nipple standard, other constructions possible
Material	Stainless Steel
Style / Connection	1/2"NPT standard, other threads possible
Length	150mm standard, other lengths possible

Datasheet notification

This datasheet is purely indicative, build-up of model code may vary from this datasheet depending on chosen model or execution!

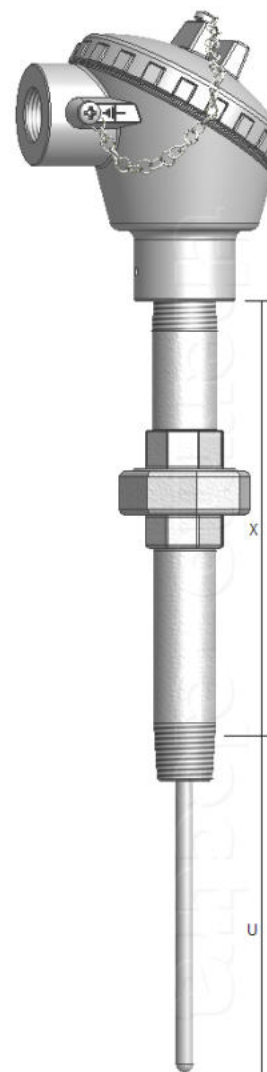

Ordering code

*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

Model	LEX25					
Thermocouple calibration						
Colour code						
Diameter "D" in mm						
Length "U" in mm						
Length "X" in mm						

H3-1 Rev.0 7/07