

DWK 6010 Vibration proof thermocouple

Design

Application Designed for use on combustion engines

Protection tube

Construction Closed-end tube

Material SS 316 - (Wst 1.4401) standard, other materials possible

Insertion length 150mm standard, other lengths possible

Diameter 8.0mm standard, other diameters possible

Process connection 1/4"BSP (G1/4"), 1/4"NPT, 1/2"BSP (G1/2"), 1/2"NPT or other threads possible

Temperature 800°C maximum

Pocket / Thermowell

Small diameter sensors can break due to high vibrations, the use of a thermowell or pocket can be imperative, check with your engine manufacturer or consult factory.

Extension cable

Heat and oil resistant, armoured extension cable 250°C

Lead wire length 1000mm standard, other lengths possible

Sensor


Thermocouple K, J or L

Accuracy According IEC 60584-1


Testing Tested 200 Volt @ 20°C

Insulation Minimum 10 M ohm

Design Vibrationproof

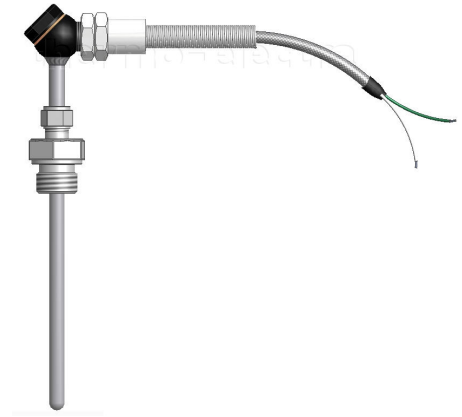

Ordering code

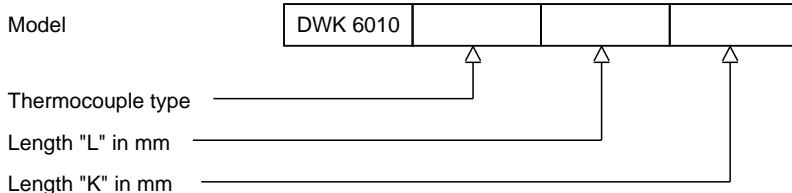

H6-1 Rev. 07/07



thermo-electra
temperature sensor solutions

Thermo Electra B.V.
Weteringweg 10
2641KM Pijnacker
The Netherlands

Phone +31 (0)15 - 3621200
Fax +31 (0)15 - 3694082
Email sales@thermo.nl
<http://www.thermo-electra.com>

