

DD 3020 Socket weld thermowell – tapered

Thermowell

Design	Drilled bar stock (solid machined)
Process connection	Socket weld
Welding diameter	26.7mm, 33.4mm or 48.3mm
Material	SS 316 - (Wst1.4401)

Stem / Shaft

Wetted part	Tapered
Diameter	Root and tip diameter to specify, standard 25 to 20mm.
Insertion length	To specify
Bore Size	6.5 mm standard
Excentricity	< 1 micrometer
Bottom thickness	5 mm

Connection length


Standard length	50mm
------------------------	------

Female connection

Threaded	1/2
-----------------	-----

Options

- Other materials and dimensions
- Plug and chain for test well
- Protective coating, PTFE, Halar, Stellite etc.
- Tagging
- Wake frequency calculation

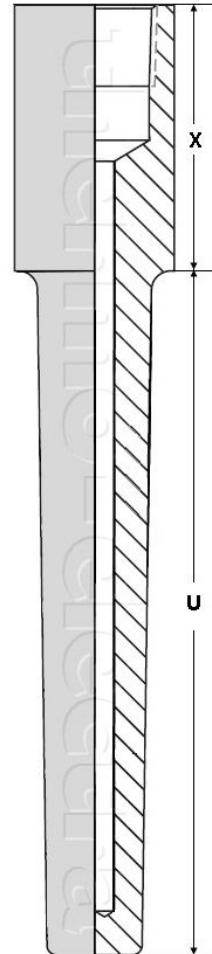

Ordering code

*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

Model	DD 3020					
Diameter welding neck in mm						
Diameter root in mm						
Tip diameter in mm						
"U" length in mm						
"X" length in mm						

H3-1 Rev.0 7/07



thermo-electra
temperature sensor solutions

Thermo Electra B.V.
Weteringweg 10
2641KM Pijnacker
The Netherlands

Phone +31 (0)15 - 3621200
Fax +31 (0)15 - 3694082
Email sales@thermo.nl
<http://www.thermo-electra.com>

