

DD 3030 Socket weld thermowell – straight

Thermowell

Design	Drilled bar stock (solid machined)
Process connection	Socket weld
Welding diameter	26.7mm, 33.4mm or 48.3mm
Material	SS 316 - (Wst1.4401)

Stem / Shaft

Wetted part	Straight
Diameter	To specify
Insertion length	To specify
Bore Size	6.5 mm standard
Excentricity	< 1 micrometer
Bottom thickness	5 mm

Connection length


Standard length	50mm
------------------------	------

Female connection

Threaded	1/2"NPT, 1/2"BSP, M20x1.5 or other threads possible
-----------------	---


Options

- Other materials and dimensions
- Plug and chain for test well
- Protective coating, PTFE, Halar, Stellite etc.
- Tagging
- Wake frequency calculation

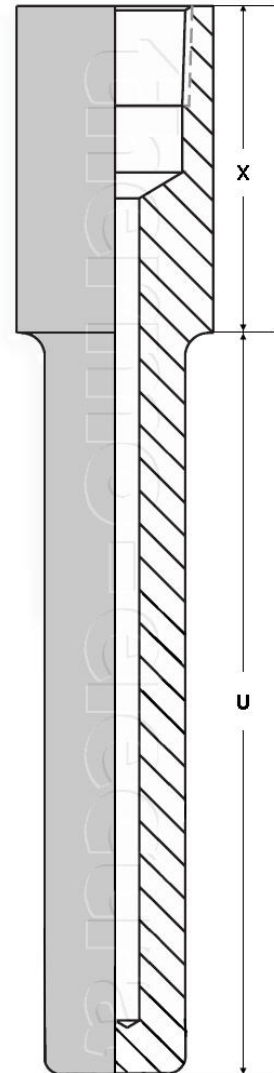

Ordering code

*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

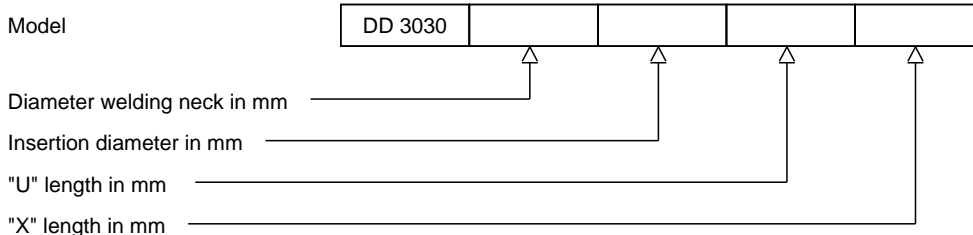

H3-1 Rev.0 7/07



thermo-electra
temperature sensor solutions

Thermo Electra B.V.
Weteringweg 10
2641KM Pijnacker
The Netherlands

Phone +31 (0)15 - 3621200
Fax +31 (0)15 - 3694082
Email sales@thermo.nl
<http://www.thermo-electra.com>

