


# TE1310 Mini jack up to 540°C

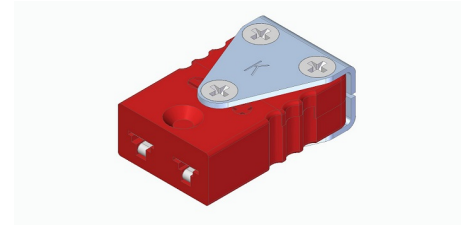

## Application

<b>Connector</b>	Thermocouple and RTD circuits
<b>Design</b>	Suited for small wires and mineral insulated cables
<b>Materials</b>	Glass filled thermoplastic body with original thermocouple material contacts

## Temperature rating

<b>Temperature limit</b>	Maximum 540°C, 425°C continuous
--------------------------	---------------------------------

## Construction

<b>Body</b>	Glass filled thermoplastic material
<b>Design</b>	Rugged one body design
<b>Molded barriers</b>	Prevent short circuit

## Wire size


<b>Accepts wires</b>	From 0,002 mm to 0,6 mm
<b>Cable jacket diameter</b>	Maximum 4,5 mm.
<b>Optional accessories</b>	See separate datasheet

## Colourcode

<b>Available colors</b>	Brown only, without color pigment. Thermocouple calibration printed
-------------------------	---

## Ordering code

\*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

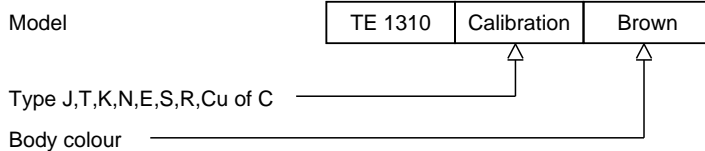

H9-1 Rev.0 7/07



**thermo-electra**  
temperature sensor solutions

Thermo Electra B.V.  
Weteringweg 10  
2641KM Pijnacker  
The Netherlands

Phone +31 (0)15 - 3621200  
Fax +31 (0)15 - 3694082  
Email sales@thermo.nl  
<http://www.thermo-electra.com>

