

# FB 3150 Threaded protectiontube according to DIN 43772 Form 2G, 3G

## Fabricated tube well

**Design** 2G or 3G to DIN 43772  
**Process connection** Welded Male threaded  
**Material** SS 316 - ( Wst 1.4401 )

## Instrument connection

**Free moving nut** Male M24x1.5mm standard  
**Welded nut** Optional: Female nut 1/2

## Stem /Shrank

**Insertion length** To specify  
**DIN43772 Form 2G** Straight over full length  
**DIN43772 Form 3G** Tip tapered over 50 mm to dia. 9.0 mm  
**Inside diameter** To suit 6.0mm or 8.0mm sensors

## Process connection

**Process connection** 1/2  
**Lagging** To specify  
 Other materials: Monel400, Hasteloy C276 or C4, Titanium Gr.II


## Options

Other dimensions  
 Tantalum protective jacket

Tube size	Sensor	Form
9 x 1 mm	6.0mm	2G or 3G
11 x 2 mm	6.0mm	2G or 3G
12 x 2.5 mm	6.0mm	2G or 3G
14 x 2.5 mm	8.0mm	2G or 3G
15 x 3 mm	8.0mm	2G or 3G



## Ordering code

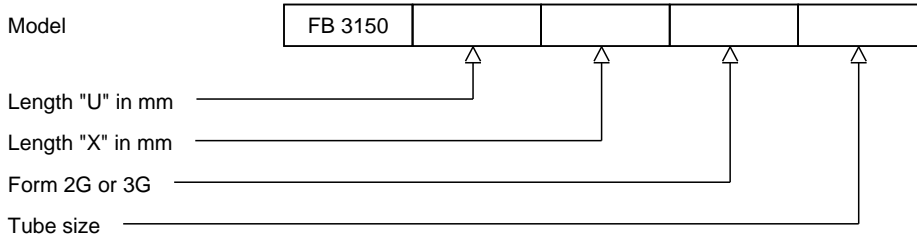

H3-1 Rev. 07/07



**thermo-electra**  
 temperature sensor solutions

Thermo Electra B.V.  
 Weteringweg 10  
 2641KM Pijnacker  
 The Netherlands

Phone +31 (0)15 - 3621200  
 Fax +31 (0)15 - 3694082  
 Email sales@thermo.nl  
 http://www.thermo-electra.com

