


# Cladding, coating and sleeves

Chemical resistant coating: PTFE / PFA / Teflon® PVDF / Kynar® or Halar® coating offer the best resistance for nearly all chemicals. Wide range of temperatures from cryogenic to high temperatures.

E-CTFE Halar -100°C / +200°C, Layer 500 tot 1000um. PFA Teflon -200°C / 260°C, layer 500 tot 1000um. PTFE Teflon -200°C / 250°C, layer standard 60um.

Used for food, pharmaceutical, acid, caustic and electroplating applications.

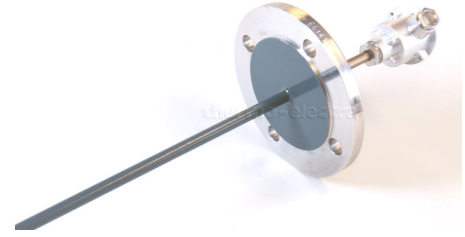

## Cladding

Wear resistant top layer from: Deloro Stellite®, Eutalloy®, Inconel 625 Tungsten carbide Wear - resistant Chromium oxide (Cr2O3) Wear - resistant Alumina (Al2O3) as a top coat layer results in an excellent wear - resistant thermowell

## Metal sleeves

Corrosion resistant sleeves: thermowell sleeve made of tantalum (tantalum) or titanium fits over a standard stainless steel thermowell and offers an inexpensive way to protect the well against corrosion of highly corrosive chemical solutions and liquids.

Used for food and beverages, pharmaceutical, acid, caustic and electroplating applications.

## Plastic Sleeves

Chemical resistant sleeves made of PTFE / PFA Teflon® give a very good resistance to almost all aggressive and / or chemical substances. Very good heat resistant and also gives cryogenic stability.

Are made of tube, base and sheet material and then bonded together by

## Coating

## Ordering code

\*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

Model

Option

H3-1 Rev. 07/07



**thermo-electra**  
temperature sensor solutions

Thermo Electra B.V.  
Weteringweg 10  
2641KM Pijnacker  
The Netherlands

Phone +31 (0)15 - 3621200  
Fax +31 (0)15 - 3694082  
Email sales@thermo.nl  
<http://www.thermo-electra.com>

