

80531 Clamp surface probe

General

Application	Surface temperature measurement of bearings
Sensor	Springloaded tip with ceramic insulation
Mounting	Adjustable spindle

Sensor

Thermocouple	Type K
Accuracy	According IEC 60584-1
Response time	20 seconds
Max. tip temperatuur	300°C / 572°F
Sensor options	On customer specifications

Mechanical Clamp


Clamp material	Nickel plated steel
Sensor	Replaceable, spare sensor model 80518 A
Adjustable	From 6 to 50 mm adjustable
Mounting	By spindle adjusting

Cable

Kabel lengte	1000 mm
Type	Coiled PUR cable
Connector	Miniature thermocouple connector, flat pins

Options

Cable color	IEC / ANSI
Connector color	IEC / ANSI

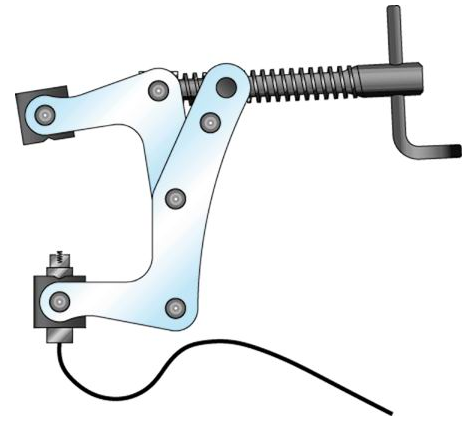

Ordering code

*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

Model

80531



thermo-electra
temperature sensor solutions

Thermo Electra B.V.
Weteringweg 10
2641KM Pijnacker
The Netherlands

Phone +31 (0)15 - 3621200
Fax +31 (0)15 - 3694082
Email sales@thermo.nl
<http://www.thermo-electra.com>

