


TE1134 Standaard strippaneel 3-polig

Toepassing

Contacten Verende 3-polige contacten, derde contact voor aarde, afscherming of 3-draads RTD

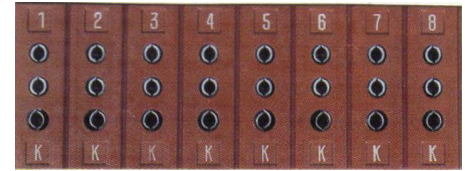

Aantal schakelingen

Schakelingen Beschikbaar 2 tot 12 schakelingen

Temperatuurbereik

Temperatuurgrens Maximaal 205°C (260°C piek)
 Hoge temperatuur versie "H" Maximum 425°C (540°C piek)

Constructie

Body Glasgevuld thermoplastisch materiaal
 Ontwerp Solid enkel stuk, T-moer bevestigd paneel aan de voorkant
 Codering Krasbestendige nummering

Afmetingen

Hoogte 57,2mm
 Breedte 19mm x aantal schakelingen


Kleurcode

Derde contact Derde contact is koper t.b.v. grounding/aarde

Thermocouple type	T/C Type Code	ANSI Color Code	IEC Color Code
Iron Constantan	J	Black	Black
Copper Constantan	T	Blue	Brown
Chromel Alumel (NiCr-Ni)	K	Yellow	Green
Nicrosil Nisil	N	Orange	Pink
Chromel Constantan	E	Violet	Violet
Platinum 10% Rhodium	S	Green	Orange
Platinum 13% Rhodium	R	Green	Orange
Uncompensated *	Cu	White	White
Tungsten Rhenium	C	Brown	-

* For Pt.6%Rh. / Pt.30%Rh. B type thermocouple and Pt100 sensors

Bestelcode

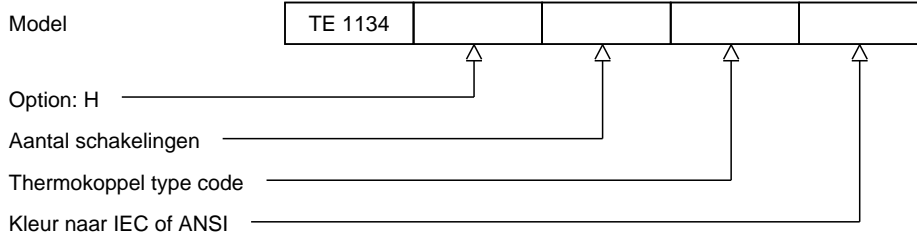

H9-2 Rev. 0 07/07



thermo-electra
 temperature sensor solutions

Thermo Electra B.V.
 Weteringweg 10
 2641KM Pijnacker
 The Netherlands

Phone +31 (0)15 - 3621200
 Fax +31 (0)15 - 3694082
 Email sales@thermo-electra.com
 http://www.thermo-electra.com

