

ML7040 Small diameter multipoint temperature sensor



Design

Protection tube	Stainless steel closed-end tube
Stepped insertion	Re-inforced tube to suit a compression gland
Material	SS 316 - (Wst 1.4401) standard, others optional
Measuring points	Number of measuring points to specify

Sensors

Calibration	K, T, J, E, N, U or L to specify
Insulation	Each sensor mineral insulated (MgO)
Hot junctions	Insulated
Testing	Tested with 50Vdc @ 20°C
Insulation resistance	Minimum 100 M ohm
Range	D ≤ 3.2mm maximum +300 °C D > 3.2mm maximum +500 °C


Dimensions

Hot junctions	"L1 to Ln" to specify
Protection	Lead wires protected by a stainless steel flexible hose
Length "K"	1000 mm standard hose length. M20x1.5 gland included
Termination	Teflon insulated flexible thermocouple wires, L=100mm
Process connection	Compression gland with metal or teflon ferule (optional)

Options

ATEX certification	Exe, Exi or Exd, to specify
Materials	SS316, SS321, SS310, Inconel 600 customer to specify

Outside diameter "D"	Sensors
1.5 mm	3
2 mm	5
3 mm, 3.2mm	6
6 mm , 6.4 mm	12

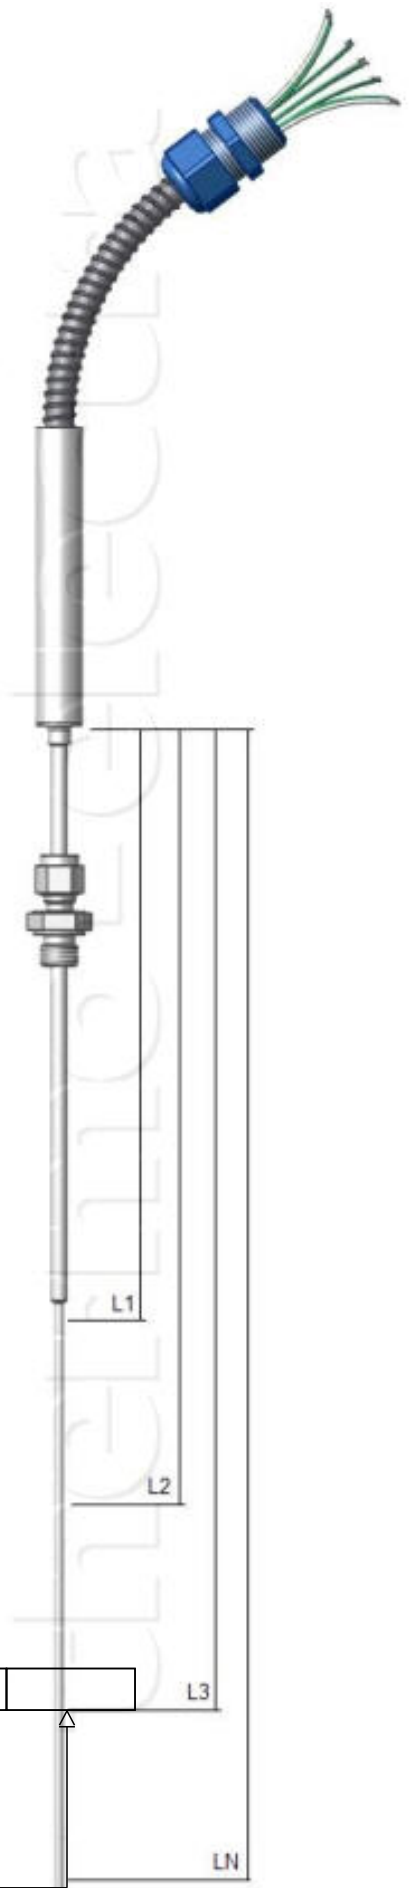

Ordering code

Model

ML7040 [] [] [] [] [] L3

Number of elements / Calibration

Reinforcement tube / sensor tube O.D. in mm

L1 to Ln, and total length L in mm

Leadwire length "K" in mm

H7-1 Rev. 07/07



thermo-electra
temperature sensor solutions

Thermo Electra B.V.
Weteringweg 10
2641KM Pijnacker
The Netherlands

Phone +31 (0)15 - 3621200
Fax +31 (0)15 - 3694082
Email sales@thermo-electra.com
http://www.thermo-electra.com

