

ME 2052 Resistance thermometer with standard jack

Construction


Design	Mineral insulated resistance thermometer (RTD) for use up to +600°C
Application	As a straight sensor however bending is allowed starting 50mm from the tip
Sheath material	SS 316 - (Wst 1.4401)
Insulation	Magnesium Oxide (MgO)
Diameter	To select 3 or 6 mm
Length	Customer to specify

Connection

Connector	Standard 2 pole jack for round pins
Model	1015 Cu, 2-pole / 1011 Cu 3-pole / 1010D Cu, 4-pole
Mounting adaptor	3mm with crimp adaptor / 6 mm with compression adaptor

Sensor

Sensor	Single or Duplex Pt100
Accuracy	According IEC 60751 Cl. B, A or AA
Measuring range	-20°C to +400°C standard, -220°C to +600°C optional
Connection	2-, 3- or 4-wire system
Insulation test	Tested 500 Vdc @ 20°C
Insulation resistance	Minimum 100Mohm

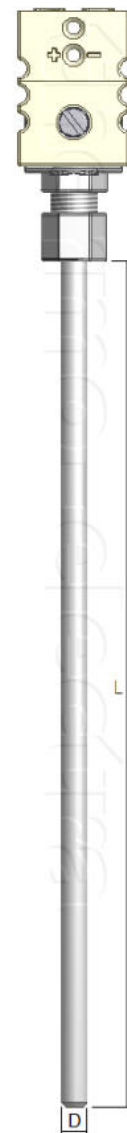

Ordering code

*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

Model	ME 2052					
Sensor (S or D)						
Connection 2-, 3- or 4-wire						
Class B, A or AA						
Diameter "D" in mm						
Length "L" in mm						

H2-1 Rev.0 7/07



thermo-electra
temperature sensor solutions

Thermo Electra B.V.
Weteringweg 10
2641KM Pijnacker
The Netherlands

Phone +31 (0)15 - 3621200
Fax +31 (0)15 - 3694082
Email sales@thermo.nl
<http://www.thermo-electra.com>

